




Steel Bulb-TITE Rivets



Bulb-TITE is the original load spreading rivet. During installation, the body of the rivet folds into 3 separate legs which creates a large bearing surface and distributes the clamp force allowing soft or thin material to be joined without damage. The mandrel of the rivet will break flush with the head over a wide grip range which results in impressive shear strength. Bulb-TITE Rivets are usually supplied with a neoprene washer under the head for a weather tight seal.

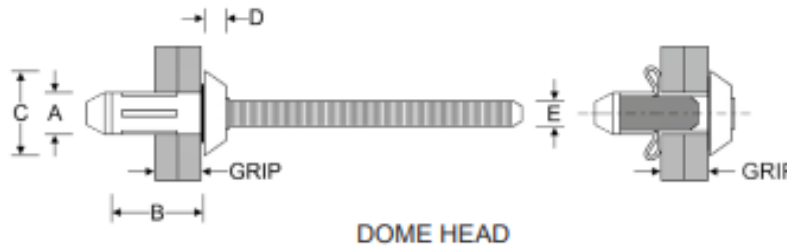

Part Code	Diameter	Grip Range	Hole Size	B	C	D	E	Shear	Tensile
DOME HEAD									
RV6676-0806W	6.3	3.2 - 9.5	6.5	23.4	13.5	2.9	3.8	5.6	4.2
RV6676-0810W	6.3	9.5 - 15.9	6.5	30.2					

Dimensions and specifications may change without prior notice. The test data presented offers approximate average strength values based on multiple tests conducted in various materials and thicknesses. For applications requiring precise strength figures or when the applied load approaches the published values.