Rivnut
Fastening Systems

1300 887 341
sales@rivnut.com.au
Unit 3, 57 Boyland Avenue,
Coopers Plains, Qld 4108

Structural Rivet Steel Hemfix Series - Dome Head

The Hemfix rivet features an interference lock ensuring the strongest vibration-resistant joints.This structural breakstem fastener has exceptional shear and tensile strength and a large blind side bearing area against the rear sheet. The large blind side bearing area spreads the load.The Hemfix fastener can be used to fasten metal to metal, metal to plastic, and thin sheet to thick metal.

Material: Carbon Steel
Finish: Zinc Plated

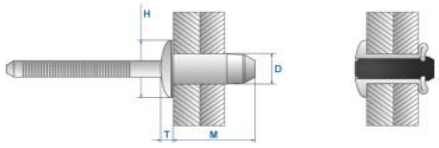

Part Number	Dia (D)	Hole Size	Length (M)	Grip Range	Head Dia (H)	Head Thickness (T)	Strength KN	
							Shear	Tensile
SRHSS-06090	4.8	4.9-5.1	9	1.5-3.5	10.2	2.5	6.0	4.4
SRHSS-06115			11.5	3.5-6.0			7.5	
SRHSS-06140			14	6.0-8.5			7.8	
SRHSS-06165			16.5	8.5-11.0			7.8	
SRHSS-06190			19	11.0-13.5			7.8	
SRHS-0812	6.4	6.7-6.9	13.7	1.5-3.5	13.4	2.6	10.5	8.8
SRHS-0813			15.0	2.8-4.8			12.0	8.8
SRHS-0815			17.0	4.8-6.8			12.5	8.8
SRHS-0817			19.0	6.8-8.8			14.0	8.8
SRHS-0819			21.0	8.8-10.8			16.0	8.8
SRHS-0821			23.0	10.8-12.8			16.0	8.8
SRHS-0823			25.0	12.8-14.8			16.0	8.8

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.