




**Rivnut Small Flange Steel - Hex Body**

**Material** Low Carbon Steel  
**Finish** Zinc Plated



Small flange head with hexagon metric hole provides maximum resistance to unscrewing torque.

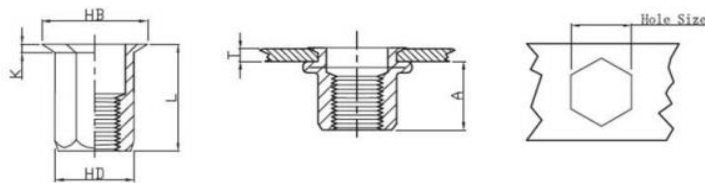

Part Number	Thread	Grip Range	Hole Size	HD	L	HB	K
RNFFSHB04	M4	0.5-2.0	6	6.00	10.00	7.00	0.50
RNFFSHB04-L	M4	2.0-4.0	6	6.00	12.20	7.00	0.50
RNFFSHB05	M5	0.5-3.0	7	7.00	12.00	8.00	0.60
RNFFSHB05-L	M5	2.0-4.5	7	7.00	14.70	8.00	0.60
RNFFSHB06	M6	0.5-3.0	9	9.00	14.50	10.00	0.60
RNFFSHB06-L	M6	3.0-5.0	9	9.00	16.00	10.00	0.60
RNFFSHB08	M8	0.5-3.0	11	11.00	17.50	12.00	0.50
RNFFSHB08-L	M8	3.0-5.5	11	11.00	20.00	12.00	0.50
RNFFSHB10	M10	1.0-3.5	13	13.00	23.00	14.50	1.00
RNFFSHB10-L	M10	3.0-6.0	13	13.00	25.00	14.50	1.00
RNFFSHB12	M12	1.0-4.0	16	16.00	25.00	18.00	1.00
RNFFSHB12-L	M12	3.5-6.5	16	16.00	28.00	18.00	1.00

Thread Size	Pull-Out		Maximum Torque NM
	KN	KN	
M4	6.30	1.40	5.10
M5	8.00	2.50	7.80
M6	14.00	3.00	12.30
M8	15.00	4.00	31.40
M10	19.70	5.20	45.00

Dimensions and specifications are subject to change without notice.