




Rivnut Large Flange Stainless Steel-Euro

Material Stainless Steel A2
Finish Stainless Steel A2



Optimal for high push-out applications. Straight metric hole sizes. Splined body improves torque-to-turn resistance

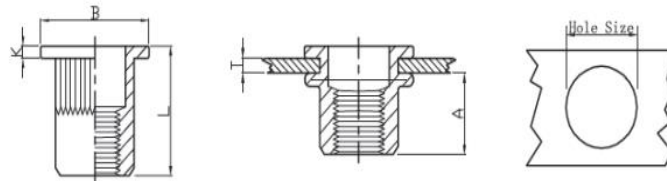

Part Number	Thread	Grip	Hole Size	A	B	L	K
RNFLST03	M3	0.5-2.0	5	6.00	8.00	10.00	0.80
RNFLST04	M4	0.5-2.5	6	6.00	9.00	10.50	0.80
RNFLST04-L	M4	2.5-4.0	6	6.00	9.00	12.00	0.80
RNFLST05	M5	0.7-3.0	7	7.50	10.00	13.00	1.00
RNFLST05-L	M5	2.5-4.0	7	8.50	10.00	16.50	1.00
RNFLST06	M6	0.3-3.0	9	9.20	12.30	15.50	1.30
RNFLST06-L	M6	2.5-5.0	9	10.50	12.30	19.50	1.30
RNFLST08	M8	0.5-3.0	11	11.50	14.50	18.50	1.50
RNFLST08-L	M8	3.0-5.5	11	11.50	14.50	21.00	1.50
RNFLST10	M10	1.0-4.0	13	13.50	17.00	21.50	1.70
RNFLST10-L	M10	4.0-7.0	13	13.50	17.00	24.00	1.70
RNFLST12	M12	1.0-4.0	16	13.50	18.00	22.00	2.00

Thread Size	Pull-Out	Push-Out	Maximum Torque NM
M3	5.30	3.30	3.00
M4	9.80	4.90	4.90
M5	15.70	6.90	9.80
M6	20.60	9.80	15.50
M8	29.40	12.70	29.50
M10	42.20	15.70	35.00

Dimensions and specifications are subject to change without notice.