




**Rivnut Large Flange Stainless Steel A4-SS316 -Euro**

**Material** Stainless Steel A4-SS316  
**Finish** Stainless Steel A4-SS316



**Optimal for high push-out applications. Straight metric hole sizes. Splined body improves torque-to-turn resistance**

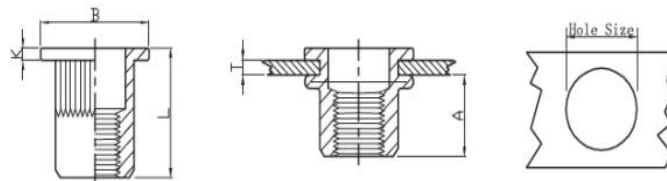

Part Number	Thread	Grip	Hole Size	A	B	L	K
RNLFSTA4-M3	M3	0.5-2.0	5	6.00	8.00	10.00	0.80
RNLFSTA4-M4	M4	0.5-2.5	6	6.00	9.00	10.50	0.80
RNLFSTA4-M4-L	M4	2.5-4.0	6	6.00	9.00	12.00	0.80
RNLFSTA4-M5	M5	0.7-3.0	7	7.50	10.00	13.00	1.00
RNLFSTA4-M5-L	M5	3.0-4.5	7	8.50	10.00	16.50	1.00
RNLFSTA4-M6	M6	0.5-3.0	9	9.20	12.30	15.50	1.30
RNLFSTA4-M6-L	M6	2.5-5.0	9	10.50	12.30	19.50	1.30
RNLFSTA4-M8	M8	1.0-3.0	11	11.50	14.50	18.50	1.50
RNLFSTA4-M8-L	M8	3.0-5.5	11	11.50	14.50	21.00	1.50
RNLFSTA4-M10	M10	1.0-3.5	13	13.50	17.00	21.50	1.70
RNLFSTA4-M10-L	M10	3.5-5.5	13	13.50	17.00	24.00	1.70

Thread Size	Pull-Out	Push-Out	Maximum Torque NM
M3	5.30	3.30	3.00
M4	9.80	4.90	4.90
M5	15.70	6.90	9.80
M6	20.60	9.80	15.50
M8	29.40	12.70	29.50
M10	42.20	15.70	35.00

Dimensions and specifications are subject to change without notice.