




Rivnut Small Flange Stainless Steel

Material Stainless Steel A2
Finish Stainless Steel A2



Optimal for high push-out applications. Straight metric hole sizes. Splined body improves torque-to-turn resistance

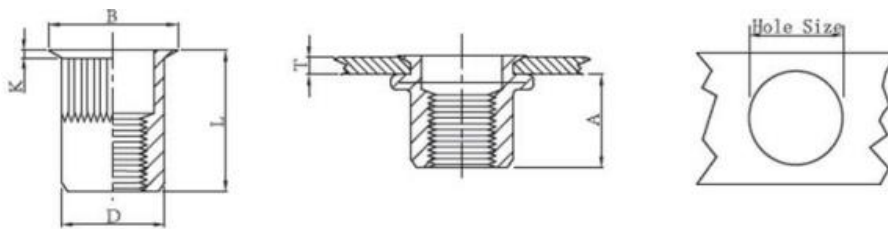

Part Number	Thread	Grip	Hole Size	A	B	L	K
RNFFST03	M3	0.5-1.5	5	5.00	8	9.00	0.50
RNFFST04	M4	0.5-2.5	6	6.00	9	10.50	0.50
RNFFST04-L	M4	2.5-4.0	6	6.00	9	12.50	0.50
RNFFST05	M5	0.5-2.5	7	7.50	10	11.50	0.50
RNFFST05-L	M5	2.5-4.5	7	7.50	10	13.50	0.50
RNFFST06	M6	0.5-3.0	9	9.20	12.5	14.00	0.60
RNFFST06-L	M6	3.0-5.0	9	9.20	12.5	16.00	0.60
RNFFST08	M8	0.5-3.0	11	9.20	12.5	16.00	0.65
RNFFST08-L	M8	3.0-5.5	11	9.20	12.5	18.50	0.65
RNFFST10	M10	1.0-4.0	13	10.20	14.5	19.00	0.65
RNFFST10-L	M10	3.5-6.0	13	10.20	14.5	21.50	0.65
RNFFST12	M12	1.0-4.0	16	10.20	14.5	15.50	0.65

Thread Size	Pull-Out	Push-Out	Maximum Torque NM
M3	4.90	2.00	3.00
M4	9.80	2.90	4.90
M5	15.70	2.90	9.80
M6	20.60	3.00	15.50
M8	29.40	4.00	29.50
M10	42.20	6.00	35.00

Dimensions and specifications are subject to change without notice.